

## CCEWOOL® Ceramic Fiber Blanket DB



Temperature Grade 1100°C (2012°F)

CCEWOOL® Ceramic Fiber Blanket DB is a new type of backing refractory insulation material in white appearance, uniform dimensions, and combines fire resistance, insulation, and thermal retention functions in one, without any binders.

Refractory Ceramic fiber blankets are unaffected by oil erosion and can quickly regain their thermal performance and physical characteristics after drying. It is primarily used for furnace lining insulation and is an economically effective insulation filling material. The installation speed of CCEWOOL® Ceramic Fiber

Blanket DB can be four times faster than regular block insulation materials and comes at a competitive price compared to mineral wool.

### Characteristics:

- Excellent chemical stability;
- Excellent thermal stability;
- Excellent tensile strength;
- Low thermal conductivity;
- Low heat capacity;
- Excellent insulation properties;
- Good sound absorption.

### Application:

- Back-up for lining systems
- Filler for insulating pads
- Expansion joint material

### TDS:

| CCEWOOL® Ceramic Fiber Blanket DB                      |                                 |
|--------------------------------------------------------|---------------------------------|
| Classification temperature                             | 1100℃ (2012°F)                  |
| Operation Temp(℃)(°F )                                 | 982 (1800°F)                    |
| Density (kg/m3)                                        | 64/ 96/ 128/160(4,6,8,10lb/ft3) |
| Shot Content(%)                                        | ≤15                             |
| Color                                                  | White                           |
| Chemical Composition of refractory ceramic blanket (%) |                                 |
| Al2O3                                                  | ≥43                             |
| SiO2                                                   | ≥52                             |

|                                                             |      |
|-------------------------------------------------------------|------|
| ZrO2                                                        | -    |
| Permanent Change on Heating (%), EN1094-1<br>After 24 hours |      |
| ®950℃ (1742°F)                                              | ≤-3  |
| ®1000℃ (1832°F)                                             | -    |
| ®1100℃ (2012°F)                                             | -    |
| ®1200℃ (2192°F)                                             | -    |
| ®1300℃ (2372°F)                                             | -    |
| ®1400℃ (2552°F)                                             | -    |
| Tensile Strength(Kg/m3), EN1094-1 KPa                       |      |
| 64kg/m3(4lb/ft3)                                            | 28   |
| 96kg/m3(6lb/ft3)                                            | 45   |
| 128kg/m3(8lb/ft3)                                           | 70   |
| 160kg/m3(10lb/ft3)                                          | -    |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3)              |      |
| 200℃ (392°F)                                                | 0.07 |
| 400℃ (752°F)                                                | 0.12 |
| 600℃ (1112 °F)                                              | 0.2  |
| 800℃ (1472°F)                                               | 0.35 |
| 1000℃ (1832°F)                                              | -    |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 6         | -               | -  | ○   | ○   | 7200   | 610, 1220 |
| 13        | -               | √  | √   | ○   | 14640  |           |
| 19        | -               | √  | √   | ○   | 9760   |           |
| 25        | ○               | √  | √   | √   | 7320   |           |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width   |
|-----------|------------------|----|----|-----|--------|---------|
| in        | 4#               | 6# | 8# | 10# | in     | in      |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24",48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |         |
| 3/4"      | -                | √  | √  | ○   | 400"   |         |
| 1"        | ○                | √  | √  | √   | 300"   |         |

|      |   |   |   |   |      |  |
|------|---|---|---|---|------|--|
| 3/2" | ○ | √ | √ | √ | 200" |  |
| 2"   | ○ | √ | √ | - | 150" |  |

Note: ( √ ) is standard size, Custom size are available

## CCEWOOL® Ceramic Fiber Blanket S



Temperature Grade 1260°C (2300°F)

CCEWOOL® Ceramic Fiber Blanket S is a high-strength needled blanket made from classic series refractory ceramic fiber spun fiber. This product contains no organic binders. Manufactured through a unique internal needle punching process with tensile strength exceeding 75KPa, making it safe, stable, energy-efficient, and highly effective. CCEWOOL® Ceramic Fiber Blanket S insulation material offers a variety of thickness, width and density to meet energy-saving requirements under different conditions.

### Characteristics:

- Excellent handling strength
- Excellent hot strength
- Low thermal conductivity
- Low heat storage
- Light weight
- Resiliency
- Thermal shock resistance
- High heat reflectance
- Excellent corrosion resistance
- Excellent thermal stability
- Excellent sound absorption
- Excellent fire protection

### Application:

- Industrial furnace wall lining;
- Back lining material;
- Furnace masonry expansion joints, door, roof heat insulation seal;
- High temperature pipe insulation material;
- Module / folded module processing material;
- Fireproof coating.
- Steel industry

Heat treating and annealing furnaces  
Furnace door linings and seals  
Soaking pit covers and seals  
Furnace hot face repairs  
Reheat furnaces  
Ladle covers  
Power generation  
Boiler Insulation  
Boiler Doors  
Reusable Turbine Covers  
Pipe Covering  
Insulation of Commercial Dryers and Covers  
Veneer Over Existing Refractory  
Stress Relieving Furnaces  
Glass Furnace Crown Insulation  
Fire Protection

**TDS:**

| <b>CCEWOOL® Ceramic Fiber Blanket S</b>                     |                                 |
|-------------------------------------------------------------|---------------------------------|
| Classification temperature                                  | 1260 (2300°F)                   |
| Operation Temp(°C)(°F)                                      | 1050 (1922°F)                   |
| Density (kg/m3)                                             | 64/ 96/ 128/160(4,6,8,10lb/ft3) |
| Shot Content(%)                                             | ≤15                             |
| Color                                                       | White                           |
| Chemical Composition of refractory ceramic blanket (%)      |                                 |
| Al <sub>2</sub> O <sub>3</sub>                              | ≥44                             |
| SiO <sub>2</sub>                                            | ≥52                             |
| ZrO <sub>2</sub>                                            | -                               |
| Permanent Change on Heating (%), EN1094-1<br>After 24 hours |                                 |
| ®950°C (1742°F)                                             | -                               |
| ®1000°C (1832°F)                                            | 1.5                             |
| ®1100°C (2012°F)                                            | 2.5                             |
| ®1200°C (2192°F)                                            | 3                               |


|                                                |      |
|------------------------------------------------|------|
| ®1300℃ (2372°F)                                | -    |
| ®1400℃ (2552°F)                                | -    |
| Tensile Strength(Kg/m3), EN1094-1 KPa          |      |
| 64kg/m3(4lb/ft3)                               | 35   |
| 96kg/m3(6lb/ft3)                               | 55   |
| 128kg/m3(8lb/ft3)                              | 75   |
| 160kg/m3(10lb/ft3)                             | 110  |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3) |      |
| 200℃ (392°F)                                   | 0.07 |
| 400℃ (752°F)                                   | 0.10 |
| 600℃ (1112 °F)                                 | 0.18 |
| 800℃ (1472°F)                                  | 0.20 |
| 1000℃ (1832°F)                                 | 0.27 |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 6         | -               | -  | ○   | ○   | 7200   | 610, 1220 |
| 13        | -               | √  | √   | ○   | 14640  |           |
| 19        | -               | √  | √   | ○   | 9760   |           |
| 25        | ○               | √  | √   | √   | 7320   |           |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width    |
|-----------|------------------|----|----|-----|--------|----------|
| in        | 4#               | 6# | 8# | 10# | in     | in       |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24", 48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |          |
| 3/4"      | -                | √  | √  | ○   | 400"   |          |
| 1"        | ○                | √  | √  | √   | 300"   |          |
| 3/2"      | ○                | √  | √  | √   | 200"   |          |
| 2"        | ○                | √  | √  | -   | 150"   |          |

Note: ( √ ) is standard size, Custom size are available

## CCEWOOL® Ceramic Fiber Blanket HPS

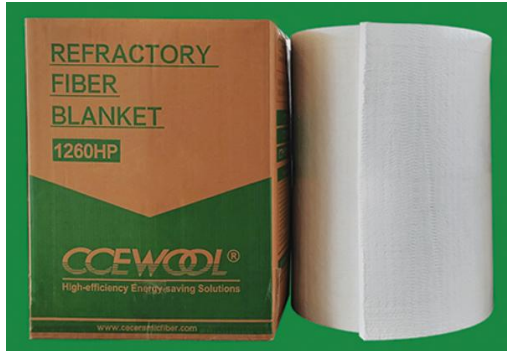

Temperature Grade 1260°C (2300°F)

CCEWOOL® Ceramic Fiber Blanket HPS, purified from raw materials with fewer impurities, is made from high-purity refractory ceramic fiber spun fiber. Compared to RCF Blanket S, this product is whiter and has a lower thermal conductivity. It contains no organic binders. Manufactured through a unique internal needle punching process, with tensile strength exceeding 85KPa, providing higher performance and longer lifespan in applications involving heat flow or chemical corrosion.

CCEWOOL® Ceramic Fiber Blanket HPS insulation material offers a variety of thickness, width, and density.

### Characteristics:

- Excellent handling strength
- Excellent hot strength
- Low thermal conductivity
- Low heat storage
- Light weight
- Resiliency
- Thermal shock resistance
- High heat reflectance
- Excellent corrosion resistance
- Excellent thermal stability

### Application:

- Furnace, kiln, reformer and boiler linings;
- Investment casting mold wrappings;
- Removable insulating blankets for stress relieving welds;
- Reusable insulation for steam and gas turbines;
- Flexible high-temperature pipe insulation;
- Pressure and cryogenic vessel fire protection;
- High-temperature kiln and furnace insulation;
- Furnace door linings and seals;
- Soaking pit seals;
- Furnace repairs;
- Thermal reactor insulation;
- Expansion joint seals;
- Primary reformer header insulation;
- High-temperature gasketing;



Glass furnace crown insulation;  
 Incineration equipment and stack linings;  
 Annealing cover seals;  
 High-temperature filtration;  
 Nuclear insulation applications;  
 Atmosphere furnace lining;  
 Field steam generator lining;  
 Chemical process heaters.

**TDS:**

| CCEWOOL® Ceramic Fiber Blanket HPS                     |                                 |  |
|--------------------------------------------------------|---------------------------------|--|
| Classification temperature                             | 1260 (2300°F)                   |  |
| Operation Temp(°C)(°F)                                 | 1100 (2012°F)                   |  |
| Density (kg/m3)                                        | 64/ 96/ 128/160(4,6,8,10lb/ft3) |  |
| Shot Content(%)                                        | ≤15                             |  |
| Color                                                  | White                           |  |
| Chemical Composition of refractory ceramic blanket (%) |                                 |  |
| Al2O3                                                  | ≥44                             |  |
| SiO2                                                   | ≥55                             |  |
| ZrO2                                                   | -                               |  |
| Permanent Change on Heating (%), EN1094-1              |                                 |  |
| After 24 hours                                         |                                 |  |
| ®950℃ (1742°F)                                         | -                               |  |
| ®1000℃ (1832°F)                                        | ≤1.5                            |  |
| ®1100℃ (2012°F)                                        | ≤2.2                            |  |
| ®1200℃ (2192°F)                                        | ≤3                              |  |
| ®1300℃ (2372°F)                                        | -                               |  |
| ®1400℃ (2552°F)                                        | -                               |  |
| Tensile Strength(Kg/m3), EN1094-1 KPa                  |                                 |  |
| 64kg/m3(4lb/ft3)                                       | 45                              |  |
| 96kg/m3(6lb/ft3)                                       | 65                              |  |
| 128kg/m3(8lb/ft3)                                      | 85                              |  |
| 160kg/m3(10lb/ft3)                                     | 125                             |  |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3)         |                                 |  |
| 200℃ (392°F)                                           | 0.06                            |  |
| 400℃ (752°F)                                           | 0.10                            |  |

|                 |      |
|-----------------|------|
| 600°C (1112 °F) | 0.17 |
| 800°C (1472°F)  | 0.20 |
| 1000°C (1832°F) | 0.26 |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 6         | -               | -  | ○   | ○   | 7200   | 610, 1220 |
| 13        | -               | √  | √   | ○   | 14640  |           |
| 19        | -               | √  | √   | ○   | 9760   |           |
| 25        | ○               | √  | √   | √   | 7320   |           |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width   |
|-----------|------------------|----|----|-----|--------|---------|
| in        | 4#               | 6# | 8# | 10# | in     | in      |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24",48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |         |
| 3/4"      | -                | √  | √  | ○   | 400"   |         |
| 1"        | ○                | √  | √  | √   | 300"   |         |
| 3/2"      | ○                | √  | √  | √   | 200"   |         |
| 2"        | ○                | √  | √  | -   | 150"   |         |

Note: ( √ ) is standard size, Custom size are available

## CCEWOOL® Ceramic Fiber Blanket LZ



Temperature Grade 1400°C (2550°F)

CCEWOOL® Ceramic Fiber Blanket LZ is primarily made from refractory ceramic fiber spun fiber as raw material with properly amount of Zr2O3, double-sided internal needle punching process. It is a lightweight, flexible refractory fiber insulation material resistant to high temperatures up to 1400°C (2550°F). CCEWOOL® Ceramic Fiber Blanket LZ exhibit excellent toughness, elasticity, and workability, making them versatile high-temperature insulation products.

### Characteristics:

High compressive strength and long service life;  
Low heat capacity and low thermal conductivity;  
Non-brittle material with good toughness;  
Small dimensional tolerance and good flatness;  
Easy to cut and install, convenient for construction;  
Excellent resistance to wind erosion;  
Continuous production with uniform fiber distribution and stable performance;  
Excellent sound absorption and noise reduction performance.

### Applications:

Industrial kiln linings and backing materials with a long-term operating temperature between 1150° C to 1250° C.  
Insulation materials for industrial kiln expansion joints, furnace doors, and top covers.  
Insulation materials for high-temperature pipelines.  
High-temperature insulation gaskets with a long-term operating temperature below 1250° C.  
Raw materials for zirconia-alumina refractory ceramic fiber modules/folded blocks.

### TDS:

| CCEWOOL® Ceramic Fiber Blanket LZ                           |                                              |
|-------------------------------------------------------------|----------------------------------------------|
| Classification temperature                                  | 1400 (2550°F)                                |
| Density (kg/m <sup>3</sup> )                                | 64/ 96/ 128/160(4,6,8,10lb/ft <sup>3</sup> ) |
| Shot Content(%)                                             | ≤15                                          |
| Color                                                       | White                                        |
| Chemical Composition of refractory ceramic blanket (%)      |                                              |
| Al <sub>2</sub> O <sub>3</sub>                              | ≥44                                          |
| SiO <sub>2</sub>                                            | ≥50                                          |
| ZrO <sub>2</sub>                                            | ≥5                                           |
| Permanent Change on Heating (%), EN1094-1<br>After 24 hours |                                              |
| ®950°C (1742°F)                                             | -                                            |
| ®1000°C (1832°F)                                            | -                                            |
| ®1100°C (2012°F)                                            | 1.5                                          |
| ®1200°C (2192°F)                                            | 2                                            |
| ®1300°C (2372°F)                                            | 3                                            |

|                                                |      |
|------------------------------------------------|------|
| ®1400℃ (2552°F)                                | -    |
| Tensile Strength(Kg/m3), EN1094-1 KPa          |      |
| 64kg/m3(4lb/ft3)                               | 45   |
| 96kg/m3(6lb/ft3)                               | 65   |
| 128kg/m3(8lb/ft3)                              | 85   |
| 160kg/m3(10lb/ft3)                             | 125  |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3) |      |
| 200℃ (392°F)                                   | 0.06 |
| 400℃ (752°F)                                   | 0.10 |
| 600℃ (1112 °F)                                 | 0.16 |
| 800℃ (1472°F)                                  | 0.2  |
| 1000℃ (1832°F)                                 | 0.26 |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 6         | -               | -  | ○   | ○   | 7200   | 610, 1220 |
| 13        | -               | √  | √   | ○   | 14640  |           |
| 19        | -               | √  | √   | ○   | 9760   |           |
| 25        | ○               | √  | √   | √   | 7320   |           |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width   |
|-----------|------------------|----|----|-----|--------|---------|
| in        | 4#               | 6# | 8# | 10# | in     | in      |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24",48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |         |
| 3/4"      | -                | √  | √  | ○   | 400"   |         |
| 1"        | ○                | √  | √  | √   | 300"   |         |
| 3/2"      | ○                | √  | √  | √   | 200"   |         |
| 2"        | ○                | √  | √  | -   | 150"   |         |

Note: ( √ ) is standard size, Custom size are available

## CCEWOOL® Ceramic Fiber Blanket 2600



Temperature Grade 1430°C (2600°F)

CCEWOOL® Ceramic Fiber Blanket 2600 is made from high-purity alumina, zirconia, and silica as raw materials through a unique fiber manufacturing process. It possesses excellent insulation properties and exhibits extremely low shrinkage characteristics at high temperatures. Its long-term operating temperature reaches around 1350°C (2462°F). This product is white in color, flexible in texture, has good flatness, and is highly temperature-resistant, delivering excellent fire resistance and insulation. It is an ideal material for

refractory, insulation, and thermal insulation applications in high-temperature environments.

### Characteristics:

- Excellent handling strength;
- Excellent hot strength;
- Low thermal conductivity;
- Low heat storage;
- Light weight;
- Resiliency;
- Thermal shock resistance;
- High heat reflectance;
- Excellent corrosion resistance;
- Excellent thermal stability.

### Applications:

- Furnace linings;
- Boiler insulation;
- Temperature control in heat treatment processes;
- Insulation for the roofs of glass furnaces;
- Furnace door seals;
- Lining for flue ducts;
- Insulation for pipelines;
- Insulation components in transportation equipment;
- Fire protection;
- Thermal sealing gaskets for household appliances;
- Thermal stress relief insulation at outdoor welding joints;
- High-temperature insulation;
- Fire-resistant insulation for fire shutter doors.



**TDS**

| CCEWOOL® Ceramic Fiber Blanket 2600                    |                             |
|--------------------------------------------------------|-----------------------------|
| Classification temperature                             | 1430HZ (2600°F)             |
| Operation Temp(°C)(°F)                                 | 1350℃ (2462°F)              |
| Density (kg/m3)                                        | 96/ 128/ 160 (6,8,10lb/ft3) |
| Shot Content(%)                                        | ≤12                         |
| Color                                                  | White                       |
| Chemical Composition of refractory ceramic blanket (%) |                             |
| Al2O3                                                  | ≥35                         |
| SiO2                                                   | ≥49                         |
| ZrO2                                                   | ≥15                         |
| Permanent Change on Heating (%), EN1094-1              |                             |
| After 24 hours                                         |                             |
| ®950℃ (1742°F)                                         | -                           |
| ®1000℃ (1832°F)                                        | -                           |
| ®1100℃ (2012°F)                                        | -                           |
| ®1200℃ (2192°F)                                        | ≤1                          |
| ®1300℃ (2372°F)                                        | ≤2                          |
| ®1400℃ (2552°F)                                        | ≤3                          |
| Tensile Strength(Kg/m3), EN1094-1 KPa                  |                             |
| 64kg/m3(4lb/ft3)                                       | -                           |
| 96kg/m3(6lb/ft3)                                       | 65                          |
| 128kg/m3(8lb/ft3)                                      | 85                          |
| 160kg/m3(10lb/ft3)                                     | 125                         |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3)         |                             |
| 200℃ (392°F)                                           | 0.06                        |
| 400℃ (752°F)                                           | 0.10                        |
| 600℃ (1112 °F)                                         | 0.15                        |
| 800℃ (1472°F)                                          | 0.19                        |
| 1000℃ (1832°F)                                         | 0.26                        |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 6         | -               | -  | ○   | ○   | 7200   | 610, 1220 |
| 13        | -               | √  | √   | ○   | 14640  |           |
| 19        | -               | √  | √   | ○   | 9760   |           |
| 25        | ○               | √  | √   | √   | 7320   |           |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width    |
|-----------|------------------|----|----|-----|--------|----------|
| in        | 4#               | 6# | 8# | 10# | in     | in       |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24", 48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |          |
| 3/4"      | -                | √  | √  | ○   | 400"   |          |
| 1"        | ○                | √  | √  | √   | 300"   |          |
| 3/2"      | ○                | √  | √  | √   | 200"   |          |
| 2"        | ○                | √  | √  | -   | 150"   |          |

Note: (√) is standard size, Custom size are available

## CCEWOOL® PUREWOOL Ceramic Fiber Blanket



Temperature Grades 1260° C (2300° F) and 1430° C (2600° F)

CCEWOOL® PUREWOOL Ceramic Fiber Blanket is a premium product among refractory ceramic fibers. It is made from upgraded materials using high-purity alumina, zirconia, and silica as raw materials. Due to its extremely low impurity content, this blanket is whiter in color. Ultra-long spun fibers are interlocked through a double-sided

internal needle punching process, providing a tensile strength of up to 90KPa. With improvements made from the raw materials, CCEWOOL® PUREWOOL Ceramic Fiber Blanket offers a longer lifespan and superior thermal insulation performance. This insulation material is available in various thicknesses, widths, and densities to meet energy-saving requirements under different conditions.

**Characteristics:**

Excellent handling strength;  
Excellent hot strength;  
Low thermal conductivity;  
Low heat storage;  
Light weight;  
Resiliency;  
Thermal shock resistance;  
High heat reflectance;  
Excellent corrosion resistance;  
Excellent thermal stability.

**Applications:**

Industrial furnace wall lining;  
Back lining material;  
Furnace masonry expansion joints, door, roof heat insulation seal;  
High temperature pipe insulation material;  
Module / folded module processing material;  
Fireproof coating;  
Steel industry;  
Heat treating and annealing furnaces;  
Furnace door linings and seals;  
Soaking pit covers and seals;  
Furnace hot face repairs;  
Reheat furnaces;  
Ladle covers;  
Power generation;  
Boiler Insulation;  
Boiler Doors;  
Reusable Turbine Covers;  
Pipe Covering;  
Insulation of Commercial Dryers and Covers;  
Veneer Over Existing Refractory;  
Stress Relieving Furnaces;  
Glass Furnace Crown Insulation;  
Fire Protection.

**TDS:**

| CCEWOOL® PUREWOOL Ceramic Fiber Blanket |              |              |
|-----------------------------------------|--------------|--------------|
| Classification temperature              | 1260(2300°F) | 1430(2600°F) |

|                                                             |                               |               |
|-------------------------------------------------------------|-------------------------------|---------------|
| Operation Temp(℃)(℉)                                        | 1100℃ (2012℉)                 | 1350℃ (2462℉) |
| Density (kg/m3)                                             | 96/ 128/ 160 ( 6,8,10lb/ft3 ) |               |
| Shot Content(%)                                             | ≤12                           |               |
| Color                                                       | White                         |               |
| Chemical Composition of refractory ceramic blanket (%)      |                               |               |
| Al2O3                                                       | ≥44                           | ≥35           |
| SiO2                                                        | ≥55                           | ≥49           |
| ZrO2                                                        | -                             | ≥15           |
| Permanent Change on Heating (%), EN1094-1<br>After 24 hours |                               |               |
| ®950℃ (1742℉)                                               | -                             | -             |
| ®1000℃ (1832℉)                                              | 1.5                           | -             |
| ®1100℃ (2012℉)                                              | 2                             | -             |
| ®1200℃ (2192℉)                                              | 2.7                           | 1             |
| ®1300℃ (2372℉)                                              | 5.5                           | 2             |
| ®1400℃ (2552℉)                                              |                               | 3             |
| Tensile Strength(Kg/m3), EN1094-1 KPa                       |                               |               |
| 64kg/m3(4lb/ft3)                                            | -                             | -             |
| 96kg/m3(6lb/ft3)                                            | 60                            | 60            |
| 128kg/m3(8lb/ft3)                                           | 90                            | 90            |
| 160kg/m3(10lb/ft3)                                          | 130                           | 130           |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3)              |                               |               |
| 200℃ (392℉)                                                 | 0.06                          | 0.06          |
| 400℃ (752℉)                                                 | 0.10                          | 0.10          |
| 600℃ (1112 ℉)                                               | 0.17                          | 0.15          |
| 800℃ (1472℉)                                                | 0.20                          | 0.19          |
| 1000℃ (1832℉)                                               | 0.25                          | 0.25          |

| Thickness | Density (kg/m3) | Length | Width |
|-----------|-----------------|--------|-------|
|-----------|-----------------|--------|-------|

| mm | 64 | 96 | 128 | 160 | mm    | mm        |
|----|----|----|-----|-----|-------|-----------|
| 6  | -  | -  | ○   | ○   | 7200  | 610, 1220 |
| 13 | -  | √  | √   | ○   | 14640 |           |
| 19 | -  | √  | √   | ○   | 9760  |           |
| 25 | ○  | √  | √   | √   | 7320  |           |
| 38 | ○  | √  | √   | √   | 4880  |           |
| 50 | ○  | √  | √   | -   | 3660  |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width    |
|-----------|------------------|----|----|-----|--------|----------|
| in        | 4#               | 6# | 8# | 10# | in     | in       |
| 1/4"      | -                | -  | ○  | ○   | 300"   | 24", 48" |
| 1/2"      | -                | √  | √  | ○   | 600"   |          |
| 3/4"      | -                | √  | √  | ○   | 400"   |          |
| 1"        | ○                | √  | √  | √   | 300"   |          |
| 3/2"      | ○                | √  | √  | √   | 200"   |          |
| 2"        | ○                | √  | √  | -   | 150"   |          |

Note: (√) is standard size, Custom size are available

## CCEWOOL® Water Repellent Ceramic Fiber Blanket



Temperature Grades 1100°C (2012°F), 1260°C (2300°F)  
CCEWOOL® Water Repellent Ceramic Fiber Blanket is a refractory ceramic fiber hydrophobic (water-repellent) blanket made from high-strength needled blanket produced from refractory ceramic fiber spun fiber. It features a solvent-based high-temperature nano-hydrophobic material as a surface treatment agent and is manufactured using a unique double-sided internal needle punching process. This product achieves overall water repellency for refractory ceramic fiber

blankets and exhibits excellent hydrophobic properties, greatly enhancing the insulation performance of the fibers. It solves the issues of reduced thermal conductivity and insulation body corrosion caused by moisture absorption in conventional fiber blankets.

### Characteristics:

- Excellent hydrophobicity;
- Excellent chemical stability;

Excellent thermal stability;  
 Excellent tensile strength;  
 Low thermal conductivity;  
 Low heat capacity;  
 Excellent insulation properties;  
 Good sound absorption

### Applications:

Sheathed steel beams and ventilation ducts;  
 Installation of firewalls, doors, and ceilings;  
 Insulation of cables and wires inside wall pipes;  
 Fire protection for ship decks and bulkheads;  
 Soundproofing enclosures and measurement rooms;  
 Sound insulation in industrial and power plants;  
 Sound barriers;  
 Building soundproofing;  
 Soundproofing for ships and automobiles.

### TDS

| CCEWOOL® Water Repellent Ceramic Fiber Blanket              |                          |               |
|-------------------------------------------------------------|--------------------------|---------------|
| Classification temperature                                  | 1100℃ (2012°F)           | 1260 (2300°F) |
| Operation Temp(℃)(°F)                                       | 982 (1800°F)             | 1050 (1922°F) |
| Density (kg/m3)                                             | 64/ 96/ 128(4,6,8lb/ft3) |               |
| Water content(%)                                            | ≤1                       |               |
| Hydrophobicity(%)                                           | ≥99                      |               |
| Shot Content(%)                                             | ≤15                      | ≤15           |
| Color                                                       | White                    |               |
| Chemical Composition of refractory ceramic blanket (%)      |                          |               |
| Al2O3                                                       | ≥43                      | ≥44           |
| SiO2                                                        | ≥52                      | ≥52           |
| ZrO2                                                        | -                        | -             |
| Permanent Change on Heating (%), EN1094-1<br>After 24 hours |                          |               |
| ®950℃ (1742°F)                                              | ≤-3                      | -             |
| ®1000℃ (1832°F)                                             | -                        | 1.5           |
| ®1100℃ (2012°F)                                             | -                        | 2.5           |
| ®1200℃ (2192°F)                                             | -                        | 3             |
| ®1300℃ (2372°F)                                             | -                        | -             |
| Tensile Strength(Kg/m3), EN1094-1 KPa                       |                          |               |

|                                                |            |            |
|------------------------------------------------|------------|------------|
| 64kg/m3(4lb/ft3)                               | 28KPa min. | 35KPa min. |
| 96kg/m3(6lb/ft3)                               | 45KPa min. | 55KPa min. |
| 128kg/m3(8lb/ft3)                              | 70KPa min. | 75KPa min. |
| Heat Conductive Co-efficient W/(m·k)(128kg/m3) |            |            |
| 200℃ (392°F)                                   | 0.07       | 0.07       |
| 400℃ (752°F)                                   | 0.12       | 0.10       |
| 600℃ (1112 °F)                                 | 0.2        | 0.18       |
| 800℃ (1472°F)                                  | 0.35       | 0.20       |
| 1000℃ (1832°F)                                 | -          | 0.27       |

| Thickness | Density (kg/m3) |    |     |     | Length | Width     |
|-----------|-----------------|----|-----|-----|--------|-----------|
| mm        | 64              | 96 | 128 | 160 | mm     | mm        |
| 25        | ○               | √  | √   | √   | 7320   | 610, 1220 |
| 38        | ○               | √  | √   | √   | 4880   |           |
| 50        | ○               | √  | √   | -   | 3660   |           |

| Thickness | Density (lb/ft3) |    |    |     | Length | Width                  |
|-----------|------------------|----|----|-----|--------|------------------------|
| in        | 4#               | 6# | 8# | 10# | in     | in                     |
| 1"        | ○                | √  | √  | √   | 300"   | 610, 1220<br>(24",48") |
| 3/2"      | ○                | √  | √  | √   | 200"   |                        |
| 2"        | ○                | √  | √  | -   | 150"   |                        |

Note: ( √ ) is standard size, Custom size are available

