
CCEWOOL Thermomax Inc.
salesusa@ccewool.com
www.ccewool.com

CCEWOOL® Ceramic Fiber Board 2600

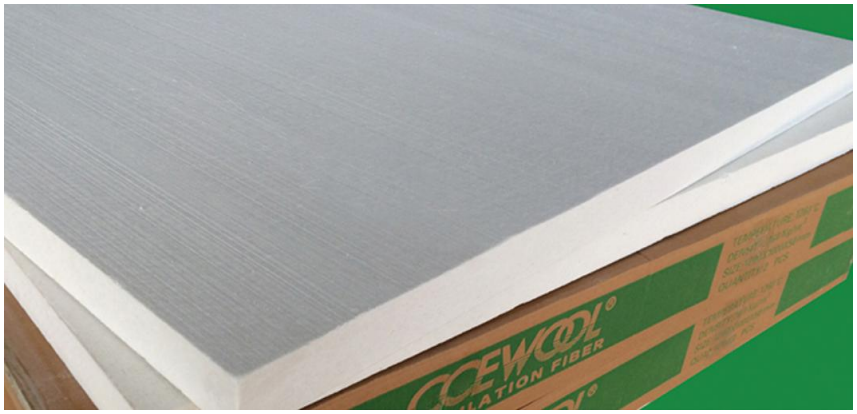

Temperature Grade

1430℃(2600℉)

CCEWOOL® Ceramic Fiber Board 2600 is an insulating material that contains zirconium refractory ceramic fibers. Zirconium is added to the production raw materials to form a high-temperature resistant zirconium-containing insulation board, providing high stability at high temperatures. It has a long-term working temperature of approximately 1350℃ (2462℉). CCEWOOL® Ceramic Fiber Board 2600 exhibits excellent chemical stability and can resist the corrosion of most corrosive media. It can withstand oxidation and reduction at high temperatures.

Characteristics:

Low heat capacity, low thermal conductivity;

Non-brittle material, good elasticity;

High compressive strength;

Excellent wind-erosion resistance, long service life;

Excellent thermal stability and thermal shock resistance;

Continuous production, even fiber distribution and stable performance;

Good sound insulation;

Good anti-stripping properties;

Easily molded or cut, easy to install;

Accurate sizes and good flatness.

Application:

Full thickness refractory lining;

CCEWOOL Thermomax Inc.
salesusa@ccewool.com
www.ccewool.com

Insulating backup to dense refractories;

Insulating backup to brick & castable;

Furnace hot face lining in ceramic kiln, box furnace & petrochemical furnace;

Board over blanket hot face lining;

Rigid high-temperature gaskets & seals;

High-temperature baffles & muffles;

Flue & chimney linings in furnaces & kilns;

Infrared element supports;

Glass tank side & end wall & port neck insulation;

Trough linings for conveying molten metals;

Molten metal trough covers;

Thermal insulation where high velocities are encountered;

Heat shields for personnel protection;

Hot gas duct linings;

Low- & high-temperature dryers;

Pouring forms for castable;

Expansion joints.

TDS

CCEWOOL® Ceramic Fiber Board 2600	
Classification Temperature	1430℃ (2600℉)
Operation Temperature	1350℃(2462℉)
Color	white
Loss of Ignition (%)	≤6
Permanent Linear Shrinkage (%)	1350℃x24h≤3.5
Modules of Rupture (MPa)	≥0.3
Compressive Strength (MPa,10% relative deformation)	
300kg/m3	≥0.25

CCEWOOL Thermomax Inc.
salesusa@ccewool.com
www.ccewool.com

360kg/m3	≥0.3
Thermal Conductivity (w/m.k)	
400℃	0.07
600℃	0.1
800℃	0.13
1000℃	0.18
Chemical Composition (%)	
Al2O3	≥35
SiO2	≥49
ZrO2	≥15
Package	Carton box or pallet

CCEWOOL® Ceramic Fiber Board 2600	
Thickness (mm)	3 - 100
Size (mm)	1200×1000 or customized size

CCEWOOL® Ceramic Fiber Board 2600	
Thickness (in)	1/8” - 4”
Size (in)	48”×40” or customized size